




# D1 LED Track Light 10W (Lumileds)

The D1 luminaire with an integrated LED source is a proposal for customers who are looking for replacements for luminaires mounted on 3-phase tracks. The appearance of the luminaire is characterized by a small construction and a small adapter that can be plugged into the track, which allows it to be used in residential investments, restaurants, offices and other public facilities. The excellent quality COB LED module by Lumileds was used as the light source. A deeply embedded LED and various angles allow you to illuminate any space without glare. Thanks to placing the power supply in the lamp head, we can enjoy a minimalist and elegant design. The product is available in the variants described below.

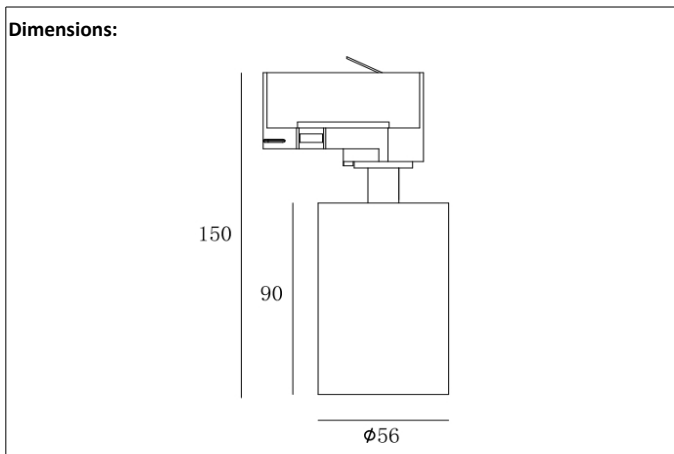

**LUMILEDS**

**KGP**

Code*:	CCT/CRI:	Φ Fixture:	Reflector:
520-x130-2x910L	3000K/90	530lm	white
520-x930-2x910L	3000K/90	530lm	black

\*x (housing): 1-white, 9-black (eg. 520-1130-23910L = white)

\*x (beam angle): 1-15°, 2-25°, 3-38°, 6-60° (eg. 520-1130-23910L = 38°)

**Additional picture:**



**Parameters:**  
power factor (PF): >0,95  
power: 10W  
voltage: 230V AC (via 3-phase track)  
beam angle: 15°, 25°, 38° or 60°  
light source: COB LED Lumileds (L2C4)  
efficiency: 53lm/W  
SDCM: 3  
lifespan L80/B50/C10: 40.000 hours (according to IEC 62717 norm)  
operating temperature range: from 0°C to +30°C  
CRI: CRI90(R9>50)  
IP rate: IP20  
compatible with track lights: GLOBAL trac, Unipro, etc.

**Dimensions:**  
diameter: 56mm  
length: 90mm  
height: 150mm

**Material:**  
aluminium housing + PCV  
weight: 0,25kg

photometric data presented with a tolerance +/- 7%

